

University of Wollongong

Research Online

Faculty of Engineering and Information
Sciences - Papers: Part B

Faculty of Engineering and Information
Sciences

2018

Fabrication and Characterisation of a Magnetized Metal-encapsulated FBG sensor for Structural Health Monitoring

Sagar Jinachandran

University of Wollongong, sj317@uowmail.edu.au

Hui Jun Li

University of Wollongong, huijun@uow.edu.au

Jiangtao Xi

University of Wollongong, jiangtao@uow.edu.au

Gangadhara B. Prusty

University of New South Wales, g.prusty@unsw.edu.au

Yuliya Semenova

Dublin Institute Of Technology

See next page for additional authors

Follow this and additional works at: <https://ro.uow.edu.au/eispapers1>



Part of the [Engineering Commons](#), and the [Science and Technology Studies Commons](#)

Recommended Citation

Jinachandran, Sagar; Li, Hui Jun; Xi, Jiangtao; Prusty, Gangadhara B.; Semenova, Yuliya; Farrell, Gerald; and Rajan, Ginu, "Fabrication and Characterisation of a Magnetized Metal-encapsulated FBG sensor for Structural Health Monitoring" (2018). *Faculty of Engineering and Information Sciences - Papers: Part B*. 1830.

<https://ro.uow.edu.au/eispapers1/1830>

Research Online is the open access institutional repository for the University of Wollongong. For further information contact the UOW Library: research-pubs@uow.edu.au

Fabrication and Characterisation of a Magnetized Metal-encapsulated FBG sensor for Structural Health Monitoring

Abstract

A novel means of metal packaging of a fibre Bragg grating (FBG) sensor using stainless steel and tin, together with high temperature resistant samarium cobalt (SmCo) magnet is proposed in this paper. The inclusion of high temperature-capable SmCo magnets enable the metal packaging of the FBG sensor with magnetic capabilities. This packaged sensor can be placed in direct contact with the substrate structures such as iron pipelines and other ferromagnetic components without any adhesives, making them easily detachable and reusable. This is a significant improvement compared to other commercial fibre optic sensors which are, surface attached using epoxies or welded to the substrate. The design parameters and characteristic properties such as load, temperature and vibration sensitivity of the magnetic metal-packaged FBG sensor are studied numerically and validated experimentally to demonstrate the feasibility of using the encapsulated reusable FBGs for structural health monitoring of compatible structures.

Disciplines

Engineering | Science and Technology Studies

Publication Details

S. Jinachandran, H. Li, J. Xi, B. Gangadhara. Prusty, Y. Semenova, G. Farrell & G. Rajan, "Fabrication and Characterisation of a Magnetized Metal-encapsulated FBG sensor for Structural Health Monitoring," IEEE Sensors Journal, vol. 18, (21) pp. 8739-8746, 2018.

Authors

Sagar Jinachandran, Hui Jun Li, Jiangtao Xi, Gangadhara B. Prusty, Yuliya Semenova, Gerald Farrell, and Ginu Rajan

Fabrication and Characterisation of a Magnetized Metal-encapsulated FBG sensor for Structural Health Monitoring

Sagar Jinachandran, Huijun Li, Jiangtao Xi, B Gangadhara Prusty, Yuliya Semenova, Gerald Farrell and Ginu Rajan

Abstract— A novel means of metal packaging of a fibre Bragg grating (FBG) sensor using stainless steel and tin, together with high temperature resistant samarium cobalt (SmCo) magnet is proposed in this paper. The inclusion of high temperature-capable SmCo magnets enable the metal packaging of the FBG sensor with magnetic capabilities. This packaged sensor can be placed in direct contact with the substrate structures such as iron pipelines and other ferromagnetic components without any adhesives, making them easily detachable and reusable. This is a significant improvement compared to other commercial fibre optic sensors which are, surface attached using epoxies or welded to the substrate. The design parameters and characteristic properties such as load, temperature and vibration sensitivity of the magnetic metal-packaged FBG sensor are studied numerically and validated experimentally to demonstrate the feasibility of using the encapsulated reusable FBGs for structural health monitoring of compatible structures.

Index Terms— acoustic emission sensors; fibre Bragg gratings; strain; temperature; welding

I. INTRODUCTION

Structural health monitoring (SHM) using optical fibre sensors (OFS) is a fast developing area of research and the design and development of field-usable sensors is currently accelerating [1]. Continuous assessment of the integrity of structures such as those used in pipelines, automotive, military applications, nuclear energy, and bridges is essential for preventative maintenance and to predict possible operational failure. This requires implementation of adequate methods for SHM of metal structures [2, 3]. In order to detect damage and failures, various types of sensors that measure parameters such as vibration, temperature, strain and stress are integrated with the structures. Among a number of currently available sensors, OFSs are becoming popular due to their capability to be embedded in, or attached to, a structure without affecting its

operation [1]. Compared with conventional electric and mechanical sensors, OFSs have unique properties such as light weight, compact size, long-term durability, good linearity, immunity to external electromagnetic interference and resistance to corrosion [4, 5].

Among the different types of fibre sensors, fibre Bragg gratings (FBGs) are widely used and are one of the most popular technology for SHM systems [6-8]. The unique capabilities of FBGs to measure multiple parameters make them attractive and also commercially viable. However, along with these advantages, they have limitations such as a degraded performance at elevated temperatures, lack of suitable packaging for direct field deployment and cross-sensitivity between strain and temperature [9].

Several methods have been proposed to package FBGs in metal [10-13] for field deployment applications. Li et al. [10] illustrated embedding of FBGs by layered manufacturing using nickel and stainless steel which was then characterised for strain and temperature measurements and found that this method of embedding will increase the temperature sensitivity of FBGs. Alemohammad et al. [11] demonstrated a way of packaging FBGs in which a thin film of silver is deposited on the fibre using a low-temperature laser micro-deposition method followed by nickel electroplating on steel using microscale laser-based direct writing method before embedding. This method can be utilised for temperatures of about 200 °C. Some of the other methods reported are aluminium and nickel electroplating, brazing, and ultrasonic welding with aluminium and tin substrates [11-13]. The strain sensitivity of FBGs can also be enhanced by using ceramic coatings such as an aluminium oxide coating spray which can be used in high -temperature applications requiring operation up to 600 °C [14-16].

In this paper, we propose, and demonstrate a novel method for metal packaging of FBG sensors, using stainless steel and tin, together with samarium cobalt (SmCo) magnets, so that they can be easily attached to structures such as iron pipelines and can operate at high temperatures. The proposed configuration will provide a metal-packaged FBG sensor which can be directly used in a range of applications, without any installation complications, in contrast to other similar commercial sensors which are surface attached using epoxies or welded to the substrate structure.

Sagar Jinachandran, Jiangtao Xi and Ginu Rajan are with the School of Electronics, Computer and Telecommunication Engineering, University of Wollongong, Australia. (email: sj317@uowmail.edu.au, ginu@uow.edu.au)

Huijun Li is with the School of Mechanical, Materials, Mechatronics and Biomedical Engineering, University of Wollongong, Australia.

B Gangadhara Prusty is with the School of Mechanical and Manufacturing Engineering, University of New South Wales, Australia.

Yuliya Semenova and Gerald Farrell are with the Photonics Research Centre, Dublin Institute of Technology, Dublin, Ireland.

Section 2 of the paper describes the design and fabrication methods for the packaged FBGs. Analysis of the design is conducted using ANSYS workbench and is presented in section 3. The experimental arrangements for the characterization of the fabricated sensors are discussed in section 4 and results are discussed in section 5. It is expected that the outcome of this study will pave a way for a new economical surface mountable packaging technology for FBGs that can operate at high temperatures.

II. DESIGN AND FABRICATION OF THE MAGNETIC AND METALLIC PACKAGED FBGS

An FBG comprises a short section of single-mode optical fibre in which the core refractive index is periodically spatially modulated using an intense optical interference pattern, typically at UV wavelengths [5-6]. The light reflected by the periodic variation of the refractive index of the Bragg grating has a central wavelength λ_B given by;

$$\lambda_B = 2n_{eff} \Lambda, \quad (1)$$

where Λ is the grating period and n_{eff} is effective refractive index of the fibre. The operation of an FBG strain or temperature sensor is based on the measurement of the peak wavelength shift induced by applied strain or a change in temperature [17]. The temperature sensitivity of the FBG arises from the change in its period associated with the thermal expansion of the fibre, coupled with a change in the refractive index arising from the thermo-optic effect. The strain sensitivity arises from the change in the period of the fibre grating due to applied strain coupled with a change in the refractive index arising from the strain-optic effect. The temperature-induced wavelength shift for the peak reflected signal from a FBG is given by;

$$\Delta\lambda_B = \lambda_B \Delta T (\alpha + \xi), \quad (2)$$

where α is the thermal expansion coefficient, and ξ is the thermo-optic coefficient of fibre material [17]. Similarly the strain induced wavelength shift can be expressed as;

$$\Delta\lambda_B = \lambda_B (1 - p_\alpha) \Delta\epsilon \quad (3)$$

where $\Delta\epsilon$ is the induced static strain, and p_α is the photo-elastic coefficient. For silica fibre the value of $(1 - p_\alpha)$ is usually 0.78. Thus by measuring the wavelength shift, changes in temperature or strain can be determined [18]. Similarly for vibration induced dynamic strain, the corresponding dynamic wavelength shift can be written as

$$\Delta\lambda_B(z, t) = \lambda_B (1 - p_\alpha) \Delta\epsilon(z, t) \quad (4).$$

Where z is the axial direction along which longitudinal strain

propagates and t is the time.

It should be also noted that a typical FBG starts to deteriorate at high temperatures close to 400 °C and with a further increase in temperature the degradation is rapid [19, 20] and structural deterioration can occur [21, 22]. The FBGs used in this work were obtained from DK photonics and were 10 mm long with polyimide buffer coating and with peak reflected wavelengths of circa 1540 and 1550 nm, side lobe suppression ratio (SLSR) higher than 15 dB, peak reflectivity greater than 90% and a bandwidth of <0.3 nm. The maximum operating temperature of the polyimide-coated FBG sensors used in this experiment is 300 °C [23].

A. Design, fabrication of the packaged sensor

A cylindrical stainless-steel container is machined as shown in Fig 1(a). A disc, was machined from tin to be inserted into the cylinder (Fig 1(b)). A 1 mm-diameter hole was drilled into the centre of the container base as well as the tin disc for insertion of the optical fibres. Prior to assembly of the sensor, the FBGs were sheathed in a 30 mm-long and 1 mm-outside diameter teflon tube for protection and to impart strength to the optical fibre where it entered and exited the assembly. Four cylindrical SmCo magnets were positioned inside the container as shown in Fig. 1(c). SmCo was chosen as the magnetic material to be incorporated in this design, given its ability to withstand high temperatures and also allowed a means to position a fibre in the centre of a stainless steel container. Typically permanent magnets lose their magnetic capabilities at higher temperatures. For commonly used neodymium magnets, the operating temperature is up to 150 °C. Recently SmCo based permanent magnets have attracted interest due to their superior high-temperature properties [24, 25]. In SmCo, the interatomic exchange between the cobalt atoms gives rise to higher Curie temperatures, which depend on the transition metal sub lattice. Therefore, SmCo can have a Curie temperature of about 800 °C and an operating temperature of around 350 °C. It was for this reason that SmCo was chosen as the magnet to be incorporated in this design. Solid cylindrical magnets of 6.25 mm diameter and 12.7 mm height were used allowing for the FBG to be inserted between the magnets and accommodated easily as shown in Fig 1(c). For each sample the sheathed FBG was inserted through the hole in the tin disc (as shown in Fig 1(b)) and then into the central hole between the magnets. The entire assembly was then heated in an oven to 270 °C, which is significantly higher than the melting point of tin (232 °C) so that the tin disc melts and entirely fills the container. The sensor assembly was then allowed to cool to room temperature. The assembly process and the fabricated metal packaged sensor are shown in Fig. 1(d) and 1(e) respectively. Tin was used for the binding material as it does not react with stainless-steel. The properties of materials such as the Young's modulus, Poisson ratio and the density of the material used in the design are shown in table I.

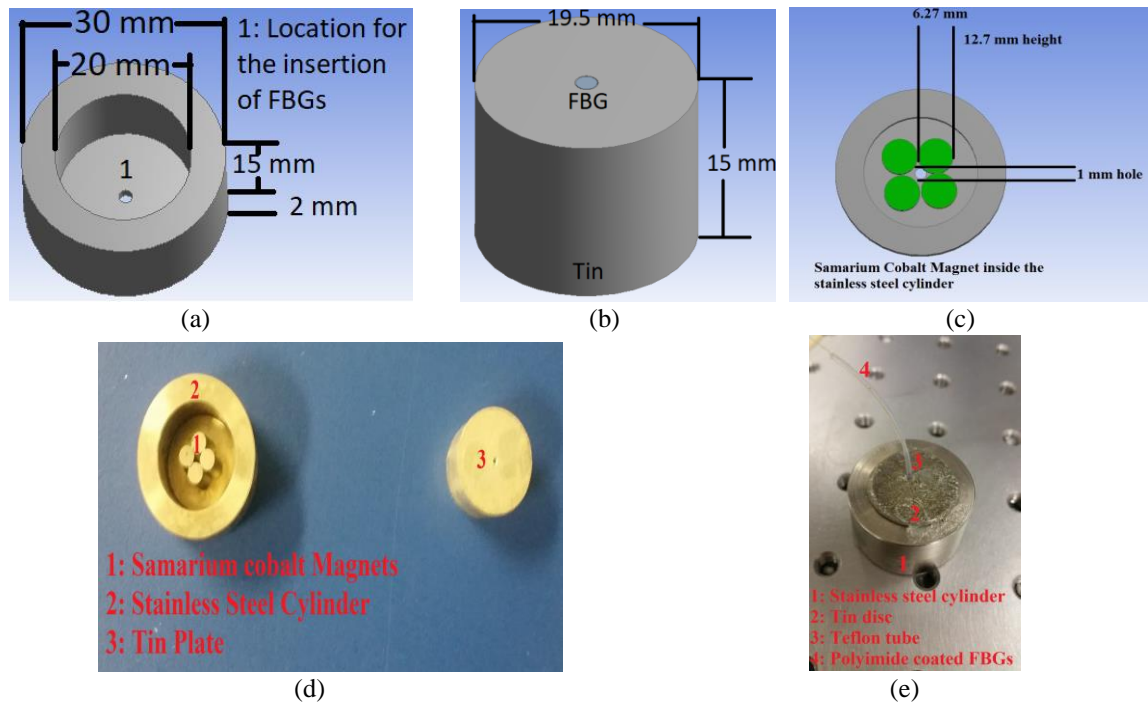


Fig.1. The schematic of (a) stainless steel cylinder region (b) cross section view of the tin disc (c) placement of SmCo magnets within the cylinder (d) the fabrication of the metal packaged magnetic FBG sensors components before the embedding, indicating the location of the SmCo magnets, stainless steel cylinder and tin discs (e) the metallic packaged FBG sensor,

Table I:
The material data for simulation in ANSYS.

Material	Youngs Modulus (Pa)	Poisson's ratio	Thermal Expansion coefficient (K^{-1})	Density ($kg\ m^{-3}$)
Stainless steel	1.93×10^{11}	0.31	1.7×10^{-5}	7750
Tin	5×10^{10}	0.25	22	7304
Samarium Cobalt	1.2×10^{11}	0.27	13×10^{-6}	0.008
Optical fibre	2.5×10^9	0.34	50	1400

The reflection spectra of the FBG were monitored before and after packaging using a commercial FBG interrogator (I-MON 256, Ibsen Photonics). A schematic diagram of the FBG interrogation setup used in this study is shown in Fig. 2. The interrogator has a wavelength resolution of 5 pm with a maximum data acquisition rate of 6 kHz, and is connected to a broadband source with a spectral range of 1530-1580 nm. The

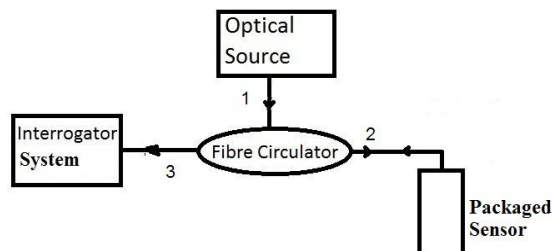


Fig 2. The schematic diagram of the FBG interrogation system

reflected signal from the FBG was directed to the interrogator through a fibre circulator. The reflection spectra of the FBG before and after packaging are shown in Fig.3. Though the reflectivity signal is reduced, no peak distortion was observed due to the packaging. It is observed that the peak reflected wavelength of the FBG before embedding was 1549.82 nm and the wavelength after embedding is 1549.76 nm. As the FBG was heated for only three hours at high temperature during the fabrication, the thermal decay to optical fibre material is not considered to be significant. However the observed blue shift of 48 pm to the FBG signal after fabrication indicates a residual strain developed within the material after the packaging which is a common phenomenon.

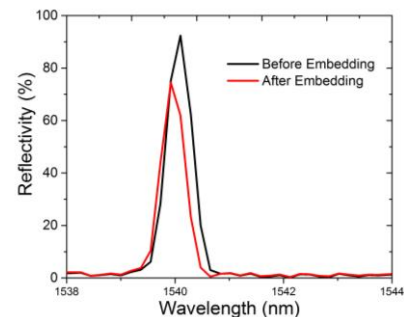


Fig 3. Reflection spectra of the FBG sensor before and after the packaging.

B. Analysis of the design using the Finite Element Method (FEM)

The packaged FBG is subjected to strain during fabrication due to the thermal expansion of the encapsulating material. An

ANSYS-based simulation tool was used to study the impact of stress and strain caused by heating on the embedded FBG sensor. We performed FEM simulation of the proposed design with the dimensions and materials as discussed in section IIA.

For the FEM analysis, the size of the meshing is selected as auto and a triangular mesh is generated which encloses the structure and the material properties such as the Young's modulus, Poisson ratio and the density of the material used in the design are shown in Table 1. The temperature was applied using the transient structural tool box to act on the whole of the structure. In both the cases a path was defined along the length of the FBG and the resultant strains for both the temperature and load were calculated. The numerical model was analysed to calculate the induced thermal strain as the temperature is increased from 20 °C to 200 °C during fabrication. Fig 4(a) shows the overall thermal strain in the structure, while Fig 4(b) shows the thermal strain experienced by the fibre containing the FBG. From Fig 4(b) the thermal strain induced on the fibre is calculated as 961.2 $\mu\epsilon$ over a temperature change of 20 to 200 °C which gives a thermal

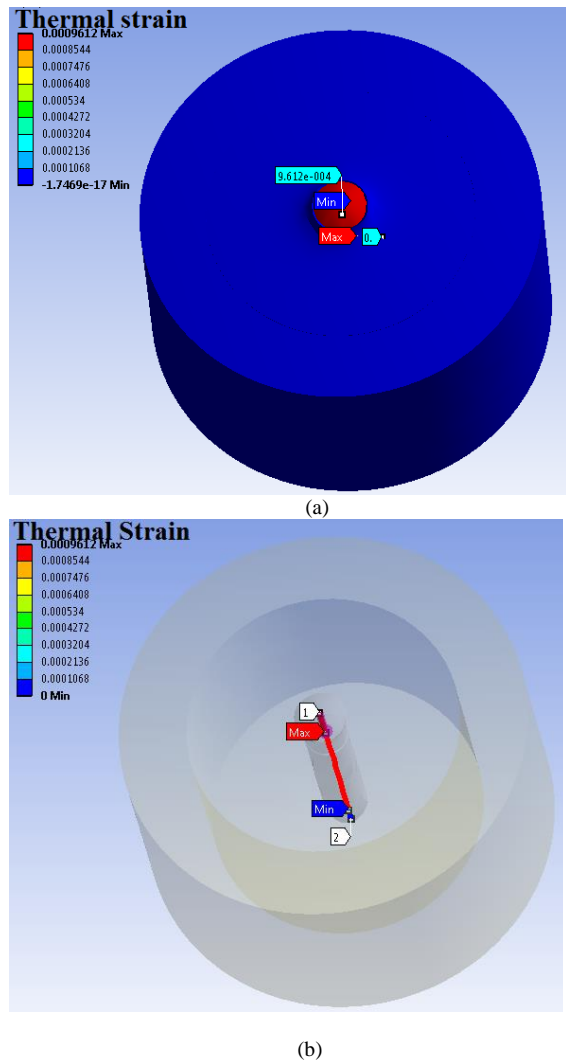


Fig 4. (a) Thermal strain profile of the packaged sensor due to applied temperature (b) the thermal strain along the embedded fibre containing the FBG

strain sensitivity of 0.4806 $\mu\epsilon/^\circ\text{C}$ for the FBG which equates to a change of 4.005 pm/ $^\circ\text{C}$. The standard temperature sensitivity for a polyimide coated FBG is 10 pm/ $^\circ\text{C}$ and the total thermal sensitivity of an FBG is the sum of the free space temperature sensitivity and thermal strain sensitivity and is estimated as 14.005 pm/ $^\circ\text{C}$.

To estimate the load sensitivity of the packaged FBG sensor we numerically calculated load-induced strain. The loads were simulated to be acting on the tin region of the packaged sensor, and a fixed support was also placed at the base of the

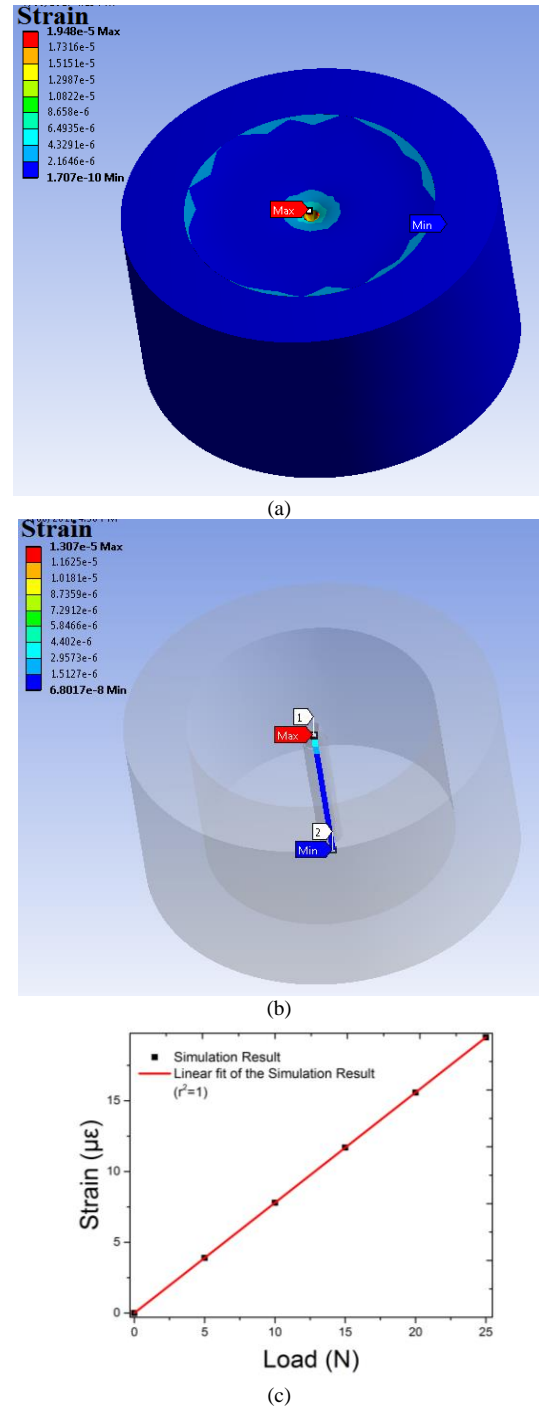


Fig. 5. (a) Strain profile of the packaged sensor with applied load (b) strain experienced by the embedded optical fibre (c) simulated load vs. strain plot of the packaged sensor

structure. The load range was selected from 0 N to 25 N in 5 N increments, applied on the base of the structure, and it was solved for the equivalent elastic strain on the FBG. The obtained elastic strain shows the expected strain values for the loads applied and it is calculated that for 25 N of applied load the embedded FBG experiences a strain of $19.46 \mu\epsilon$ which equates to a strain sensitivity of $0.7784 \mu\epsilon/\text{N}$. The strain distribution in the FBG and in the packaged material with applied load is shown in Fig 5(a) whereas the strain distribution along the FBG is shown in Fig 5(b), and a linear change in strain is experienced by the FBG with applied load when the simulation is carried out, this linear change is shown in Fig 5(c).

III. EXPERIMENTAL SET UP FOR CHARACTERISATION OF THE METAL PACKAGED FBGS

The packaged FBG sensors were characterised for load, temperature and vibration. The experimental arrangements for characterization are shown in Fig 6 (a)-(c). For load

characterization, force was manually applied to the packaged sensor using a mechanical bench vise longitudinally along the sensor as shown in Fig 6(a). The applied forces are then measured using a button load cell SLB-100 which is placed between the packaged sensor and the load application point, with a measurement range of 440 N. The theoretical percentage of error of the load cell used was $\pm 0.25\%$ RO (SLB100). The loads of up to 25 N are applied with an increment of 5 N and the corresponding wavelength shift is measured. The applied load for each increment was measured using the load cell connected to a load cell conditioner unit SCC-SG24 and a data acquisition board (NI6321e) and controlled via a LabView program. For temperature characterization, the packaged sensor is placed in a carbolite laboratory chamber furnace, and the temperature is increased up to 200°C in increments of 5°C . As the melting point of tin is 232°C , the packaged sensor was characterised only up to 200°C . After the set up reaches the desired temperature it is kept at that temperature for approximately 10 minutes. This time was allowed between each temperature recording to make sure that the temperature uniformity throughout the packaged sensor structure was achieved. The temperature attained by the packaged sensor was then verified using an infrared temperature sensor. The shift in the peak reflected wavelength induced by the temperature change was recorded by the interrogator. To evaluate the vibration measurement capability of the packaged sensor mechanical excitations were applied to the sensor using tuning forks of frequency 500 Hz and 1 kHz. The packaged FBG sensor was placed on the mechanical bench vise so that there is a firm support for the packaged FBG sensors and then the tin region of the packaged FBG sensors are excited using the tuning forks as shown in Fig 6(c). The vibration-induced dynamic wavelength shift was then measured using an interrogator capable of measuring at frequencies of up to 3 kHz. Fast Fourier transform (FFT) of the experimental data was also calculated and The sampling frequency for FFT is same as the sampling rate used which was 2400 Hz and the frequency resolution was 0.01667. No windowing, averaging or overlapping was used, to verify the applied and measured frequencies [26].

IV. RESULTS AND DISCUSSIONS

The load-induced wavelength shift of the FBG corresponding to the applied load is shown in Fig 7. Here two sets of data were obtained in order to obtain the error bars for the data after comparing the two sets of data, and the corresponding strain is calculated and is shown in Fig 7. A linear fit to the measured data is shown in the figures. A strain value of $13.37 \mu\epsilon$ is obtained for an applied load of 25 N. This corresponds to a sensitivity of $0.5348 \mu\epsilon/\text{N}$ or $0.4456 \text{ pm}/\text{N}$. The trend agrees well with the simulation results which calculated a sensitivity of $0.7784 \mu\epsilon/\text{N}$ and are also shown in Fig 7 the difference in between the simulation and the experiment may be because of the different loading and boundary conditions. The load sensitivity of the FBGs reported in the literature is in the range of approximately

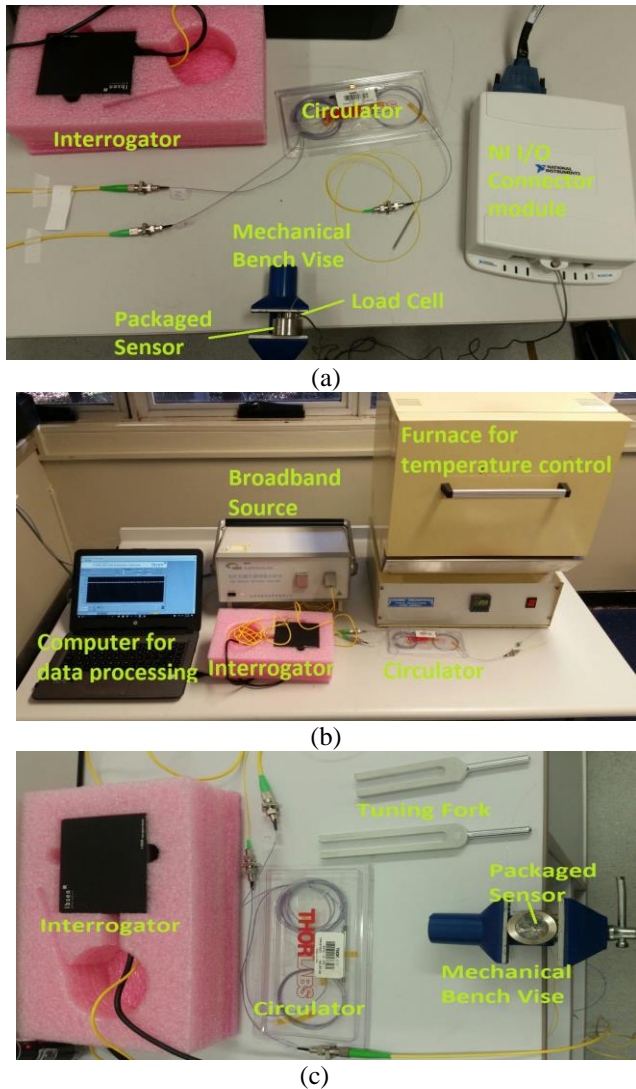


Fig. 6. The photographs of the set up for characterisation (a) load (b) temperature (c) vibration

0.1285 pm/N-1.933 pm/N [27, 28]. Compared to these values, the sensitivity of the proposed packaged sensor is in the lower mid-range of the reported ones, however it can be enhanced by re-scaling the design and packaging dimensions.

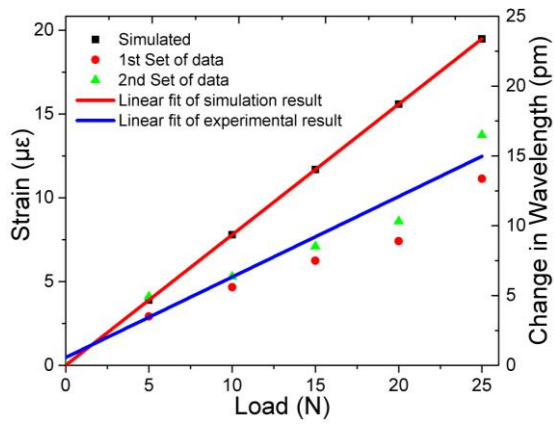


Fig. 7: Measured wavelength shift and calculated strain due to applied load calculated strain from the experiment due to applied load and its comparison with the simulation

The Bragg wavelength shift of the packaged sensor with temperature was measured and is shown in Fig 8. The temperature sensitivity of the metal-packaged FBG derived from the results is 11.16 pm/°C. This shows that the temperature sensitivity of the packaged FBG sensors is less than the simulated result of 14.00 pm/°C. The difference between the results may be due to the difference in the applied heating and boundary conditions.

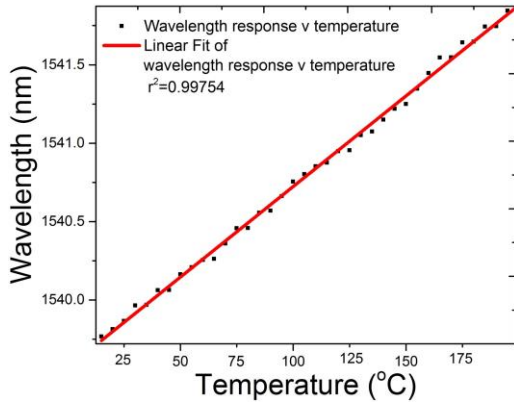


Fig. 8 Measured temperature induced wavelength shift of the packaged sensor

The vibration characteristics of the packaged sensor were measured. Fig. 9(a) shows the dynamic wavelength change of the sensor the sudden change in the wavelength at 5.5 seconds corresponds to the time when it is excited using a 500 Hz tuning fork and the corresponding FFT, is shown in Fig. 9(b). From the figures it is clear that the excitation event is resolvable with the FFT showing a measured peak at 502 Hz and its corresponding first harmonic. The measured frequency for a 1000 Hz excitation was 931 Hz.

This confirms that the fabricated metal-packaged sensor can detect vibrations and upon using with a suitable interrogation system, high frequency vibrations can be measured. Thus the

feasibility of the packaged sensor to pick up the vibrations were successfully demonstrated. It is expected that the metal embedded sensors can have a wide range of applications and can be used in many industries such as manufacturing, the

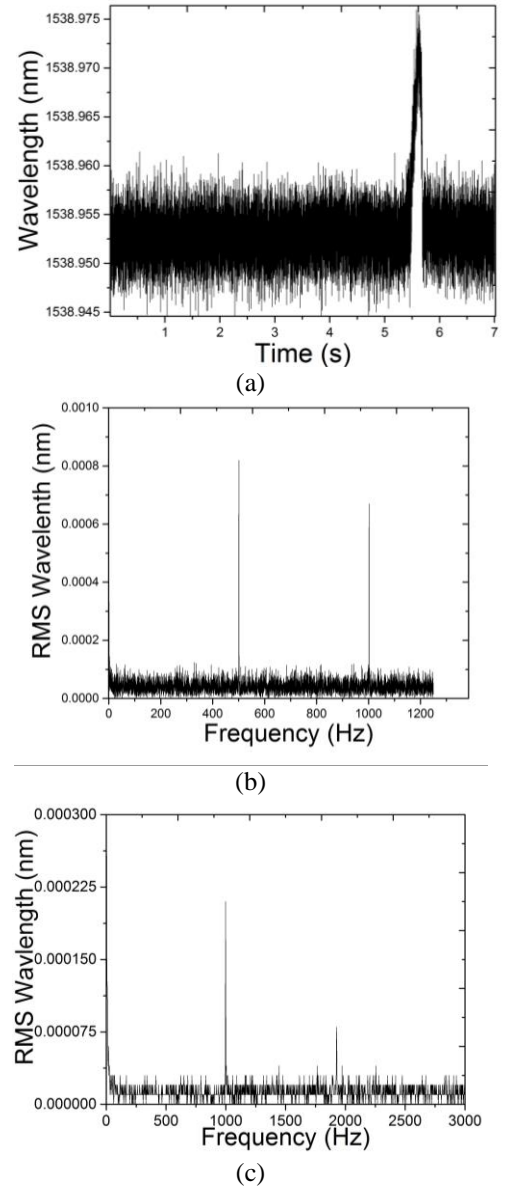


Fig. 9 (a) the wavelength v. time plot of the vibration experiment (b) the FFT plot for the measured vibration at 500 Hz, (c) the FFT plot for the measured vibration at 1 kHz

aerospace industry, the oil industry, the power industry, the automotive industry and the construction sector [20]. As such the proposed and demonstrated design of the metal-packaged sensor with magnetic capabilities can simplify field deployments for FBG sensors in the above application areas.

V. CONCLUSION

A novel means to fabricate a metal-packaged magnetic, reusable FBG was demonstrated in this paper using stainless steel and tin together with SmCo magnets. The design of the structure was analysed by finite element analysis using ANSYS. The simulation results show a temperature sensitivity

14.005 pm/°C and a load sensitivity of 0.7784 µε/N. The stand-alone packaged sensor has been characterised for load, temperature, and vibration and were compared with the simulation results. The measured load and temperature sensitivity of the packaged sensor were 0.4456 µε/N and 11.16 pm/°C respectively. The behaviour of the simulated and experimental packaged sensor were similar but the small difference in the sensitivity values are attributed to the different boundary conditions in the experiment and simulation. The vibration measurement capability of the packaged sensor was also demonstrated by exciting the packaged sensor at two different frequencies and the measured frequency was in close agreement with the applied frequency. The ease of fabrication, low cost, detachability and reusability of the metal-encapsulated FBG can make it an excellent choice for SHM especially for ferrous pipeline monitoring and for welded structures.

REFERENCES

- [1] Ginu Rajan, B. Gangadhara Prusty, "Structural health monitoring of composite structures using fibre optic methods.", CRC press, 2016.
- [2] Hong-Nan Li, Dong Shen Li, Gang-Bing Song, "Recent applications of fibre optic sensors to health monitoring in civil engineering", *Engineering Structures*, vol. 26, no. 11, pp. 1647-1657, 2004.
- [3] Shu. Minakuchi, Nobuo. Takeda, "Recent advancement in optical fiber sensing for aerospace composite structures", *Photonic Sensors*, vol. 3, no. 4, 2013.
- [4] G Periera, C. Frias, H. Faria , O Frazao , and A T. Marques, "Study of Strain Transfer of FBG sensors embedded in unidirectional composites," *Polymer testing*, vol. 32, no. 2, pp. 1006-1010, 2013.
- [5] Raman Kashyap, *Fiber Bragg Gratings*, 2nd ed., Academic Press, Burlington, M.A. 2010.
- [6] A Othaonos , K Kalli ., *Fiber Bragg Gratings Fundamentals and Applications in Telecommunication and Sensing*, Artech House, pp. 1–6, 301-389, 1999.
- [7] Q. Ye, Q. Wang, H. Zhao, J. Chen, Y. Wang, "Review of composite structural health monitoring based on fibre Bragg grating sensing principle", *Journal of Shanghai Jiatong University (Science)*, vol. 2, pp. 129-139, 2013.
- [8] B. A. Tahir, J Ali, R. A Rahman, "Strain measurement using fibre Bragg grating sensors", *Amer. J. Appl sci.*, no. special, pp. 40-48, 2005.
- [9] K.O Hill, G Meltz, "Fiber Bragg grating technology fundamentals and overview", *J Lightwave technology.*, vol. 15, no. 8, pp 1263-1276, Aug. 1997
- [10] Xiao Chun Li., Fritz Prinz, and John Seim., "Thermal Behavior of A Metal Embedded Fiber Bragg Grating Sensor," *Smart Mater. Struct.*, 10, pp. 575-579. 2001
- [11] Hamidreza Alemohammad and Ehsan Toyserkan , "Metal Embedded Optical Fiber Sensors: Laser-Based Layered Manufacturing procedures", *Journal of Material Science and engineering*, vol 133, pp 1-12, 2011
- [12] R.P Beukema, "Embedding Techniques of FBG sensors in Composites: Technologies, Applications and practical use", in 6th European workshop on Structural health monitoring, pp. 1-8. 2012,
- [13] Xiaochun Li, Fritz Prinz, R H Adams, "Metal Embedded Fibre Bragg Grating Sensors in layered manufacturing", *Journal of Manufacturing Sciences and Engineering*, Vol 125, Issue 3, July 2003.
- [14] S Sandlin, ., T Kinnunen, ., J Ramo, ., and M Sillanpaa, "A Simple Method For Metal Re-Coating of Optical Fibre Bragg Gratings," *Surf. Coat. Technol.*, 201, pp. 3061–3065. 2006,
- [15] C. Y. Kong., and R Soar, "Methods for Embedding Optical Fibers in an Aluminum Matrix by Ultrasonic Consolidation," *Appl. Opt.*, 44, pp. 6325-6333. 2005,
- [16] C Lupi., F Felli., L Ippoliti, M. A. Caponero, M Ciotti, V Nardelli, , and A Paolozzi, "Metal Coating for Enhancing the Sensitivity of Fibre Bragg Grating Sensors at Cryogenic Temperature," *Smart Mater. Struct.*, 14, 11, pp. N71–N76. 2005
- [17] Y. J. Rao, "In-fiber Bragg grating sensors," *Measurement Science and Technology*, vol. 8, pp. 355-375, 1997
- [18] Ginu. Rajan, Yuliya. Semenova, Gerrald. Farrell. "Analysis and Performance evaluation of an all fibre wide range interrogation for a Bragg grating sensor array.", *Journal of Optics A:Pure and Applied Optics*, Vol.11. 2009.
- [19] V Mishra, M Lohar, A Amphawan, "Improvement in temperature sensitivity of FBG by coating of different materials", *Optik*, vol. 127, pp 825-828, 2016
- [20] W Morey et al., "Recent Advances in Fiber Grating Sensors for Utility Industry Applications", *Proc. SPIE* vol. 2594, 1995
- [21] Bowei Zhang, Mojtaba Kahrizi, "High-Temperature resistance fiber Bragg Grating temperature sensor fabrication", *IEEE sensors journal*, vol 7, no. 4, pp586-591 April 2007.
- [22] Y Shen, J. He, Y Qiu, W Zhao, S. Chen, T Sun, and K. T. V Grattan, "Thermal Decay Characteristics of Strong Fiber Bragg Gratings Showing High-Temperature Sustainability," *J. Opt. Soc. Am. B*, 24(3), pp. 430–438: 2007,
- [23] Ping Liu, Liqui Men, Qiying Chen, "Polymer-coated Fibre Bragg Grating sensors for simultaneous monitoring of soluble Analytes and Temperature" *IEEE sensors journal*, Vol 9 Issue 4, pp 340-345. 2009.
- [24] J Zhou, R Skomski, C Chen, G. C. Hadjipanayis, D J Sellmyer, "Sm-Co-Cu-Ti high temperature permanent magnets," *Applied Physics Letters*, vol. 77, no. 10, pp. 1514-1516, 2000.
- [25] R. Skomski, "Finite temperature behavior of anisotropic two-sublattice magnets," *Journal of applied physics*, vol. 83, no. 11, pp. 6724-6726, 1998.
- [26] Ginu Rajan, Manjusha Ramakrishnan, Yuliya Semenova, Andrzej Domanski, Anna Bockowska, Tomasz Wolinski and Gerrald Farrell, "Analysis of Vibration Measurements in a composite material using an embedded PM-PCF Polarimetric Sensor and an FBG sensor", *IEEE sensors journal*, Vol 12, No 5, pp1365-1371 May 2012:
- [27] Ricardo Correia, Edmon Chehura, Jin Li, Stephen W James, Ralph P Tatam, "Enhanced Sensitivity Fibre Bragg grating (FBG) load sensor, Measurement science and technology, Vol 21, No 9, 2010.
- [28] Guoming Ma, Naiqiang Mao, Yabo Li, Jun Jiang, Hongyang Zhou, Chengrong Li, "The re-usable load cell with protection applied for online monitoring of overhead transmission lines based on fibre Bragg gratings, *Sensors*, Vol 16, No. 6, 2016.